

# SANKYO FRONTIER CO.,LTD.

# GORILLA



## CHECKERED MODEL

An exceptionally durable storage unit:  
Created with a strong emphasis on  
strength and functionality.



Made with anti-slip checkered steel plates

Can be secured by locking the shutter



PHOTO: Gorilla  
Checkered Model, Type 1.9

※ Images are for illustrative purposes only.

## EASILY PURCHASE YOUR OWN COMPACT WAREHOUSE!

### Various Uses, at Your Convenience

Gorilla can be used for the storage of:

**Materials and tools** at construction sites

**Extra stock** during temporary increases in shop inventory

**Agricultural products** during harvest season


### Product Features

- **Folded Steel Plates**  
The use of steel frames in the design contributes to a sturdy body.
- **Large Roller Shutter**  
Providing easy access when storing or removing your items.
- **Galvanized Steel Floor**  
Added durability and resistance against rust.
- **Compact Design**  
Like a box, the unit can be easily relocated and installed again.

**MOBILE SPACE** by SANKYO FRONTIER



## Figure Drawing

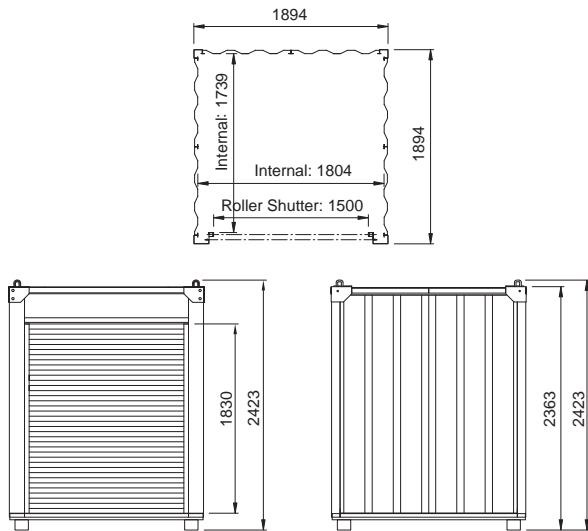

## Gorilla: Checkered Model Type 1.9 Product Specifications

Exterior	L1894xW1894xH2423
Effective Interior	L1804xW1739xH2146
Effective Opening	L1500xH1830 (Lightweight Steel Shutter)
Floor Area	3.14m <sup>2</sup>
Structure	Lightweight Steel Frame
Roof	Galvanized Steel Sheet (Thickness = 0.5)
Ceiling	Plywood (Thickness = 6)
Wall	Interior: (Thickness = 1.5) Folded Steel Plate with Powder Coating
Floor Finish	Base & Floor Frame: Hot-dip Galvanizing Floorboard : Checkered Steel Plate (Thickness = 2.3) with Hot-dip Galvanizing
Floor Load	295kg/m <sup>2</sup>
Gross Weight	Approximately 500kg

※ Measurement Units: mm ※ Specifications are subject to change without notice. ※ Colours on the catalogue may differ slightly from the actual product. ※ A building construction application may be required for installation. ※ Additional restrictions may apply according to the Building Standards Act, depending on the location, project scale, etc.

※ The maximum loading capacity when hoisting is 1T, including the weight of the unit itself, and the load carried by the unit. Please check the specifications table for the weight of the unit.  
 ※ When lifting up the unit, please check the cargo's center of gravity and take extra precautions such as skid-prevention, to ensure that nothing slips through the roller shutter.  
 ※ Should you be concerned about degradation over time, please ensure that there are no abnormalities in the hanging brackets.

### SANKYO FRONTIER CO.,LTD.

5 Shintoyofuta, Kashiwa City, Chiba, Japan 277-8539  
 T: +81-4-7133-6666 (Representative)  
 W: <http://www.sankyofrontier.com>  
 ✉ [info@sankyofrontier.com](mailto:info@sankyofrontier.com)

### SANKYO FRONTIER CO.,LTD. SINGAPORE BRANCH

150 Beach Road, #28-04 Gateway West, Singapore 189720  
 T: +65-6957-6268  
 ✉ [info\\_sg@sankyofrontier.com](mailto:info_sg@sankyofrontier.com)

### SANKYO FRONTIER MALAYSIA SDN. BHD.

#30-01, Q Sentral, 2A, Jalan Stesen Sentral 2,  
 Kuala Lumpur Sentral, Kuala Lumpur 50470, Malaysia  
 T: +60-3-2780-5831  
 ✉ [info\\_my@sankyofrontier.com](mailto:info_my@sankyofrontier.com)

### SANKYO FRONTIER MYANMAR CO.,LTD.

95-A, Level 6, Room No-601, Unit D, Kyaik Wine Pagoda Road,  
 8th Mile, Mayangone Township, Yangon 11061, Myanmar  
 T: +95-1-664-117  
 ✉ [info\\_mm@sankyofrontier.com](mailto:info_mm@sankyofrontier.com)

## CONNECT WITH US

[www.sankyofrontier-global.com](http://www.sankyofrontier-global.com)



@SankyoFrontierGlobal



@sankyofrontier



Sankyo Frontier Co., Ltd.